



Air seal against PEF backing
rod installed by builder

Line of EZpanel system beyond


Slab must be sealed by the builder using
a suitable waterproofing membrane prior
to the installation of the joinery. The
membrane must seal the entire sill area
and 100mm up the jamb frame

WANZ window support bar as required

Rebate in slab must be completely
waterproofed with Tankit proprietary
waterproofing as supplied by
Specialized Construction Products

Specialized Masonry
Leveling compound with
selected plaster finish

Selected masonry plaster to fill & create
door sill with slope of 15° min with selected
finishing plaster to match cladding

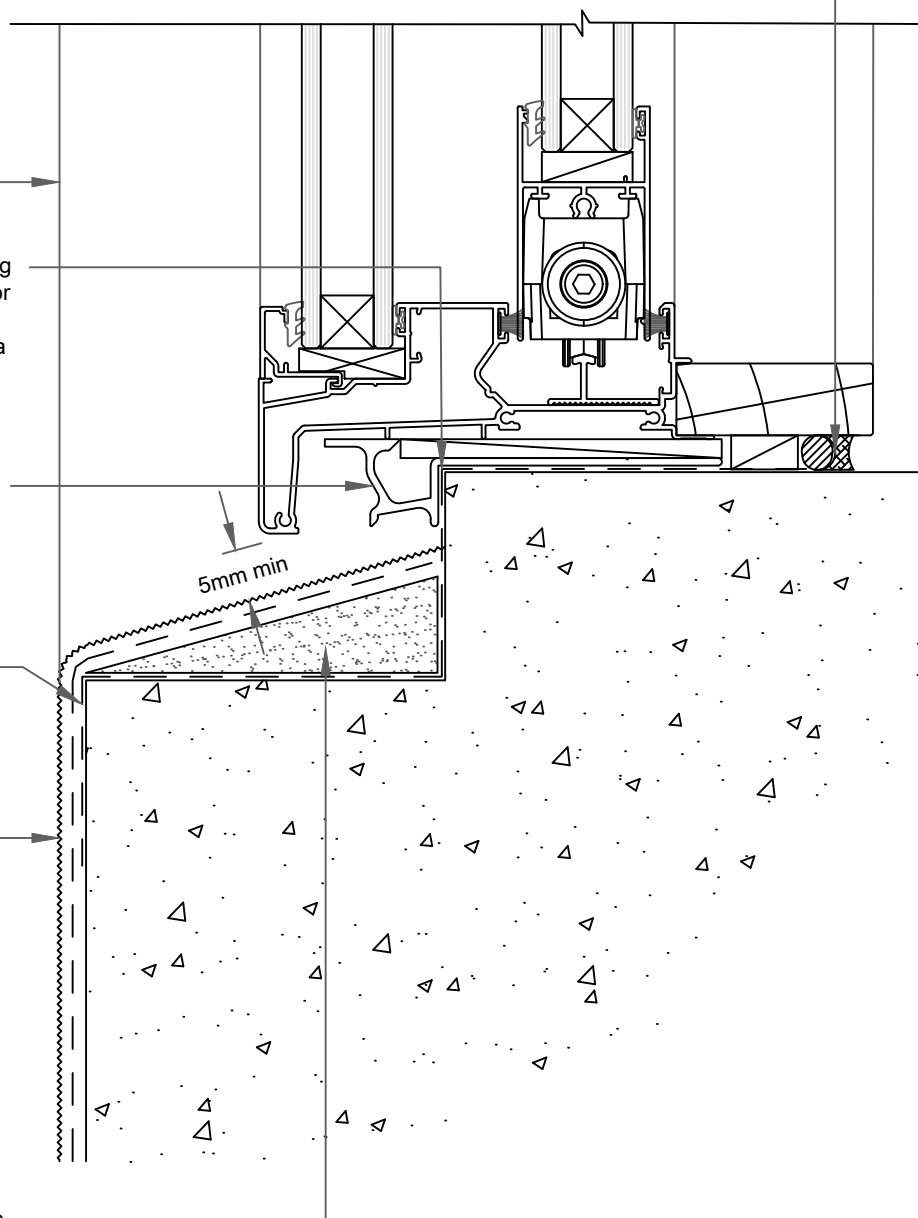

09C

SCALE: 1:2

DOOR SILL - REBATED

EZPANEL