


caution: to ensure the proprietary flashings for this system can be installed correctly, please allow a gap of 24mm from the surface of the building paper to the backside of the aluminium joinery

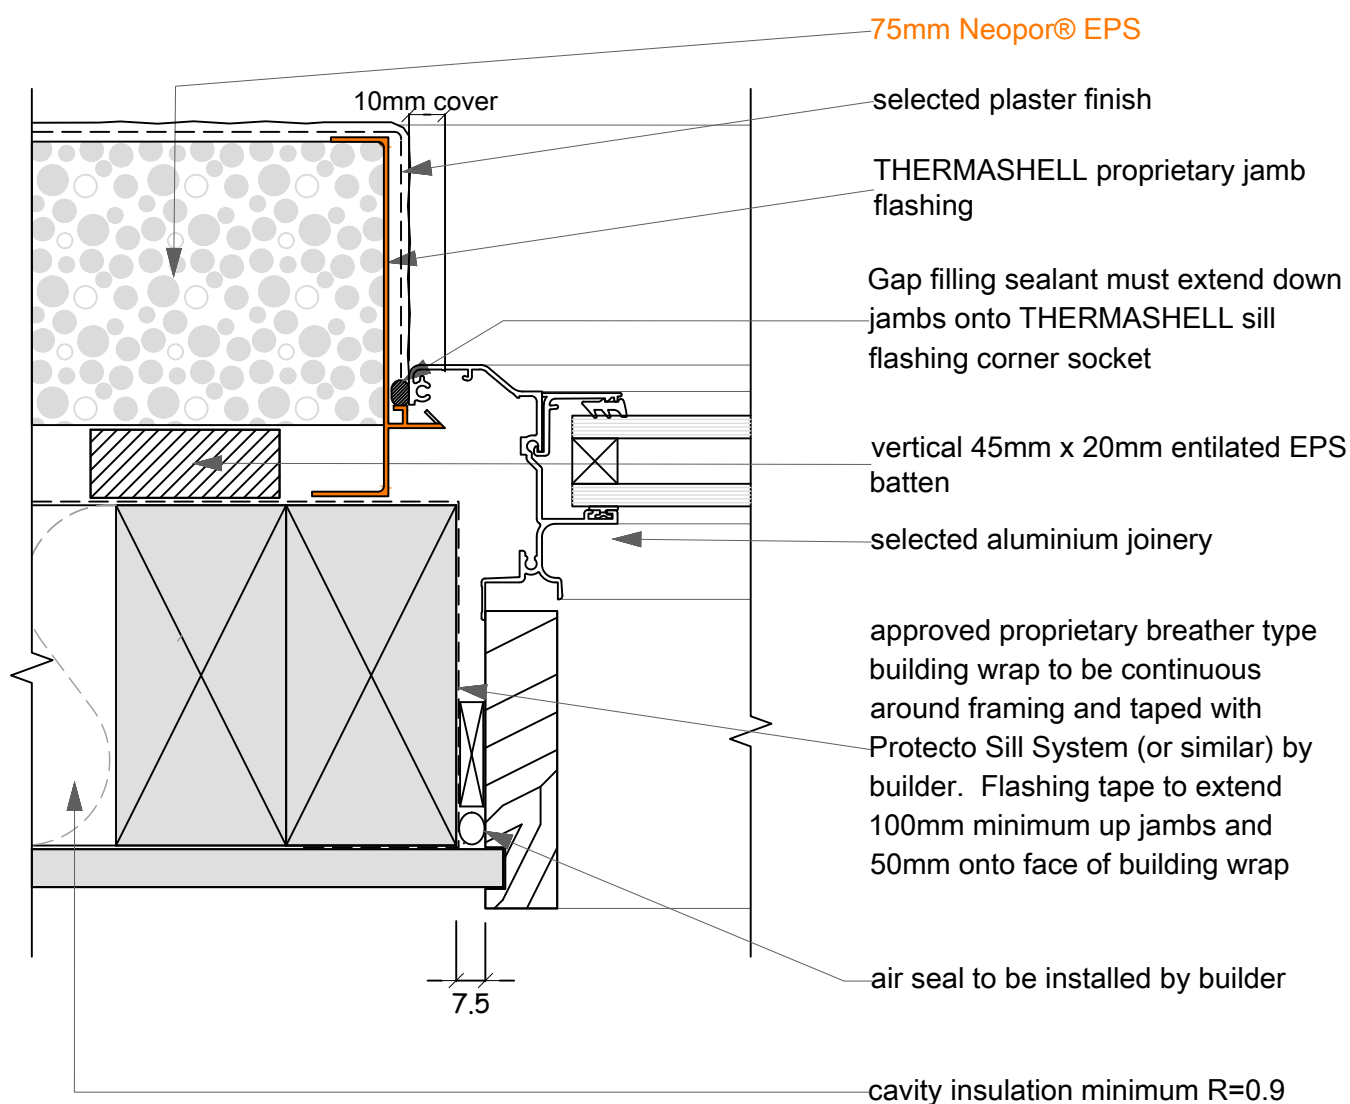

note: jambs and head flashing must be sealed or PVC welded where they intersect

02A

SCALE: 1:2

Window Jamb:
THERMASHELL