



EzPanel

LIGHTWEIGHT CONCRETE CLADDING SYSTEM



Air seal against PEF backing rod installed by builder

Line of EZpanel system beyond


Slab must be sealed by the builder using a suitable waterproofing membrane prior to the installation of the joinery. The membrane must seal the entire sill area and 100mm up the jamb frame

Joinery support bar in accordance with E2/AS1

Rebate in slab must be completely waterproofed with Tankit proprietary waterproofing as supplied by Specialized Construction Products

Specialized Masonry Leveling compound with selected plaster finish

Selected masonry plaster to fill & create door sill with slope of 15° min with selected finishing plaster to match cladding

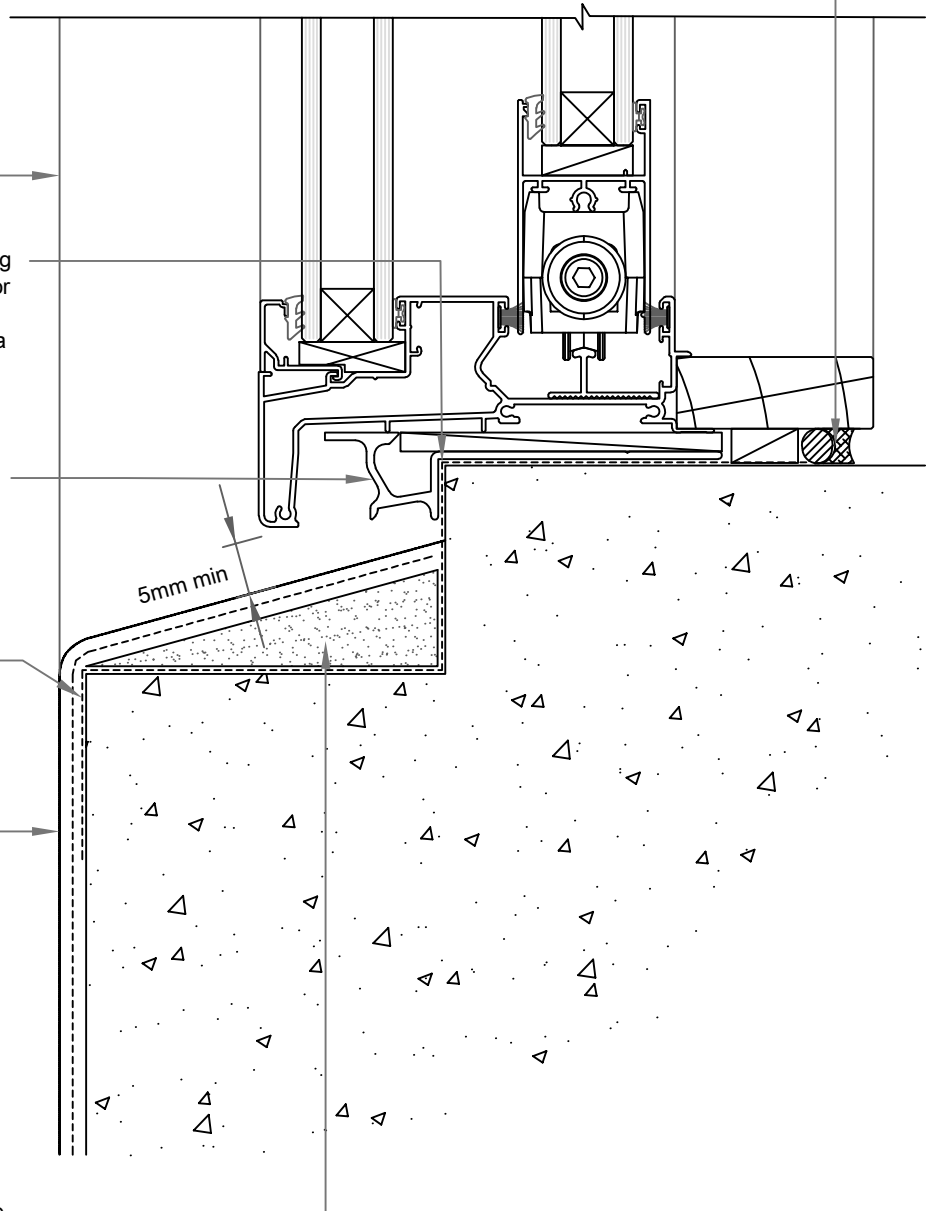

09C

SCALE: 1:2

DOOR SILL DETAIL - REBATED SLAB

50mm EZpanel - 20mm cavity with EPS Battens