




EzPanel

LIGHTWEIGHT CONCRETE CLADDING SYSTEM



Note: this drawing is outside of the BRANZ Appraisal.

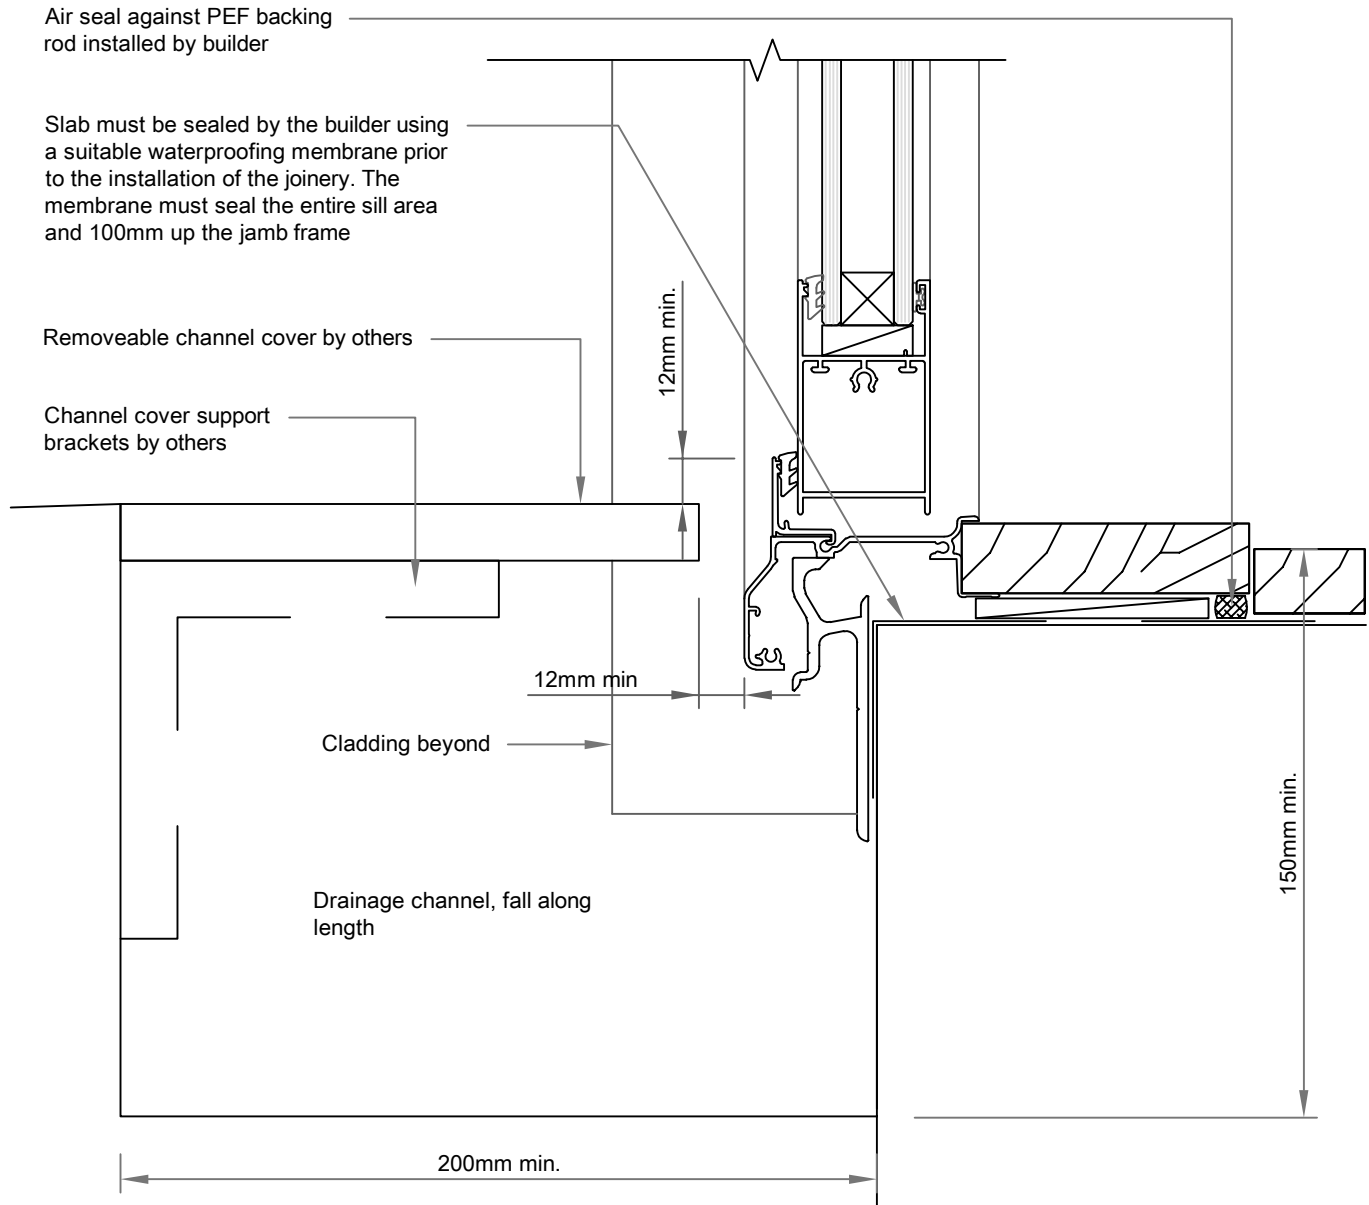

Where provision for level access is required from a concrete floor slab to exterior paving this shall be as shown in Figure 17B with:

A channel, together with drainage provisions, across the door opening, with:

- the width to suit capacity in accordance with E1/AS1
- a minimum depth of 150mm,
- a maximum length of 3700mm, and
- 1:200 minimum fall along length of channel towards a drainage outlet

09D

DOOR SILL DETAIL - LEVEL THRESHOLD

SCALE: 1:2

50mm Ezpanel - 20mm cavity with EPS Battens