




EzPanel

LIGHTWEIGHT CONCRETE CLADDING SYSTEM

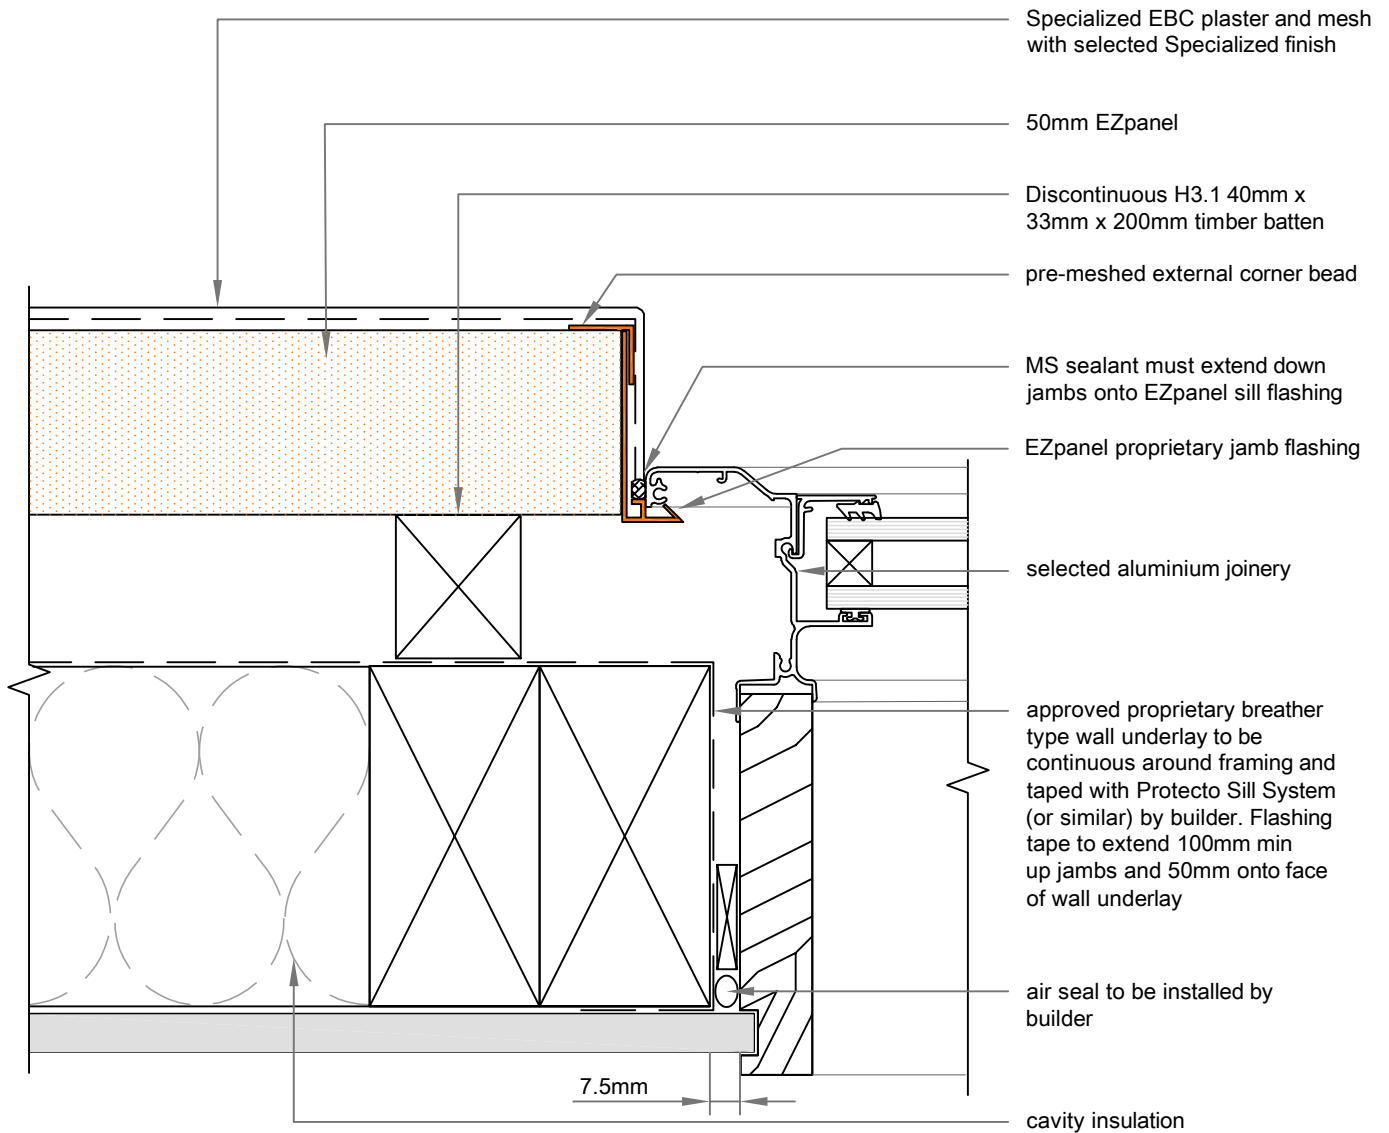

note: jambs and head flashing must be sealed or PVC welded where they intersect

Caution: to ensure the proprietary jamb and sill flashings can be installed correctly, please allow a gap of 44mm from the surface of the building paper to the back side of the aluminum joinery.

02A

SCALE: 1:2

WINDOW JAMB DETAIL

50mm EZpanel - 40mm cavity with timber battens