




EzPanel

LIGHTWEIGHT CONCRETE CLADDING SYSTEM

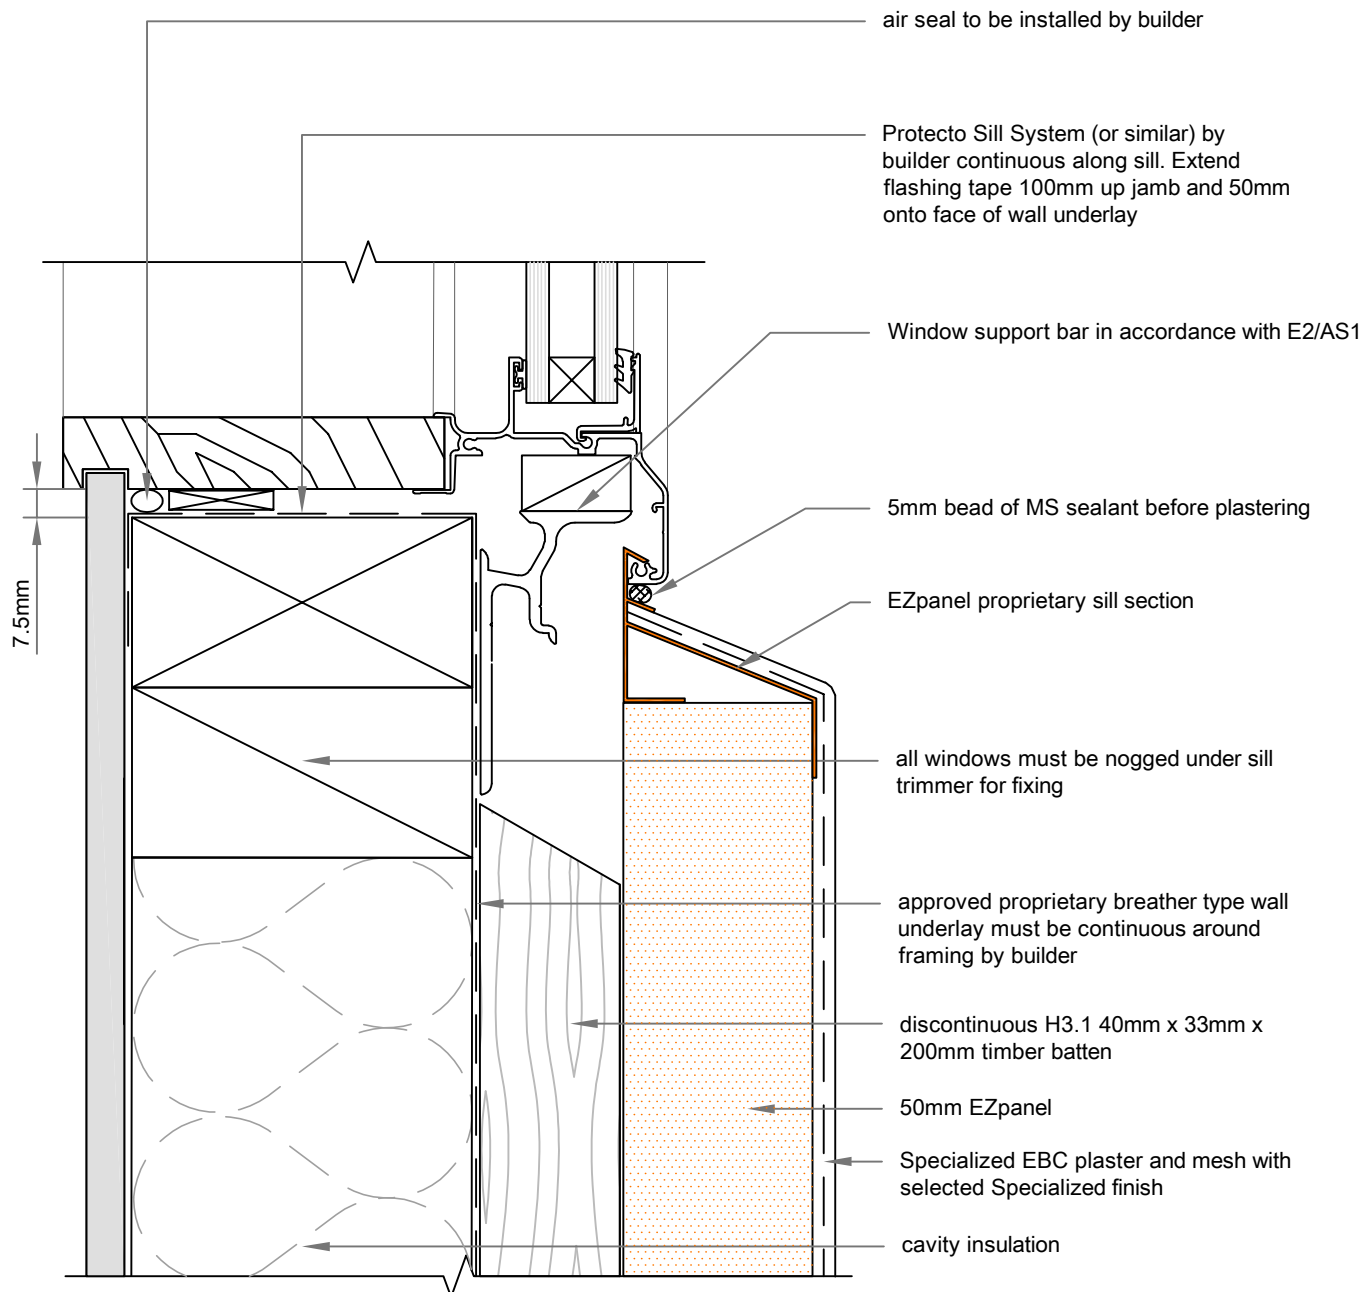

note: a 5° sloped sill trimmer must be used if the back of the glazing pocket is positioned back past the line of wall frame

caution: to ensure the proprietary jamb and sill flashings can be installed correctly, please allow a gap of 44mm from the surface of the building paper to the back side of the aluminum joinery.

03A

WINDOW SILL DETAIL

SCALE: 1:2

50mm EZpanel - 40mm cavity with timber battens