




EzPanel

LIGHTWEIGHT CONCRETE CLADDING SYSTEM

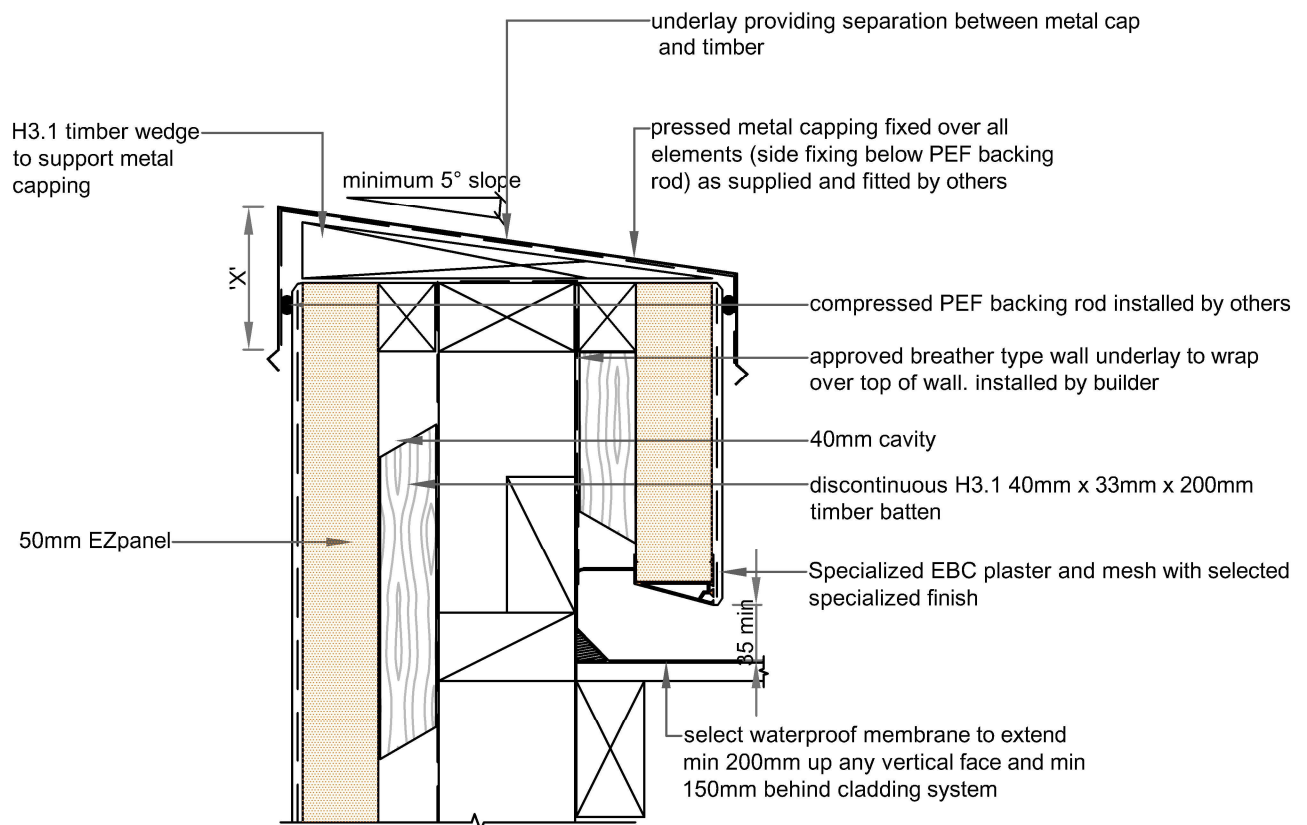

'X' = variable according to windzone refer to NZBC E2/AS1, table 7

note: if roof is being used as an internal gutter the cladding must be a minimum of 100mm above the membrane surface

13B

PARAPET TIMBER WEDGE DETAIL

SCALE: 1:5

50mm EZpanel - 40mm cavity with timber battens