




EzPanel

LIGHTWEIGHT CONCRETE CLADDING SYSTEM

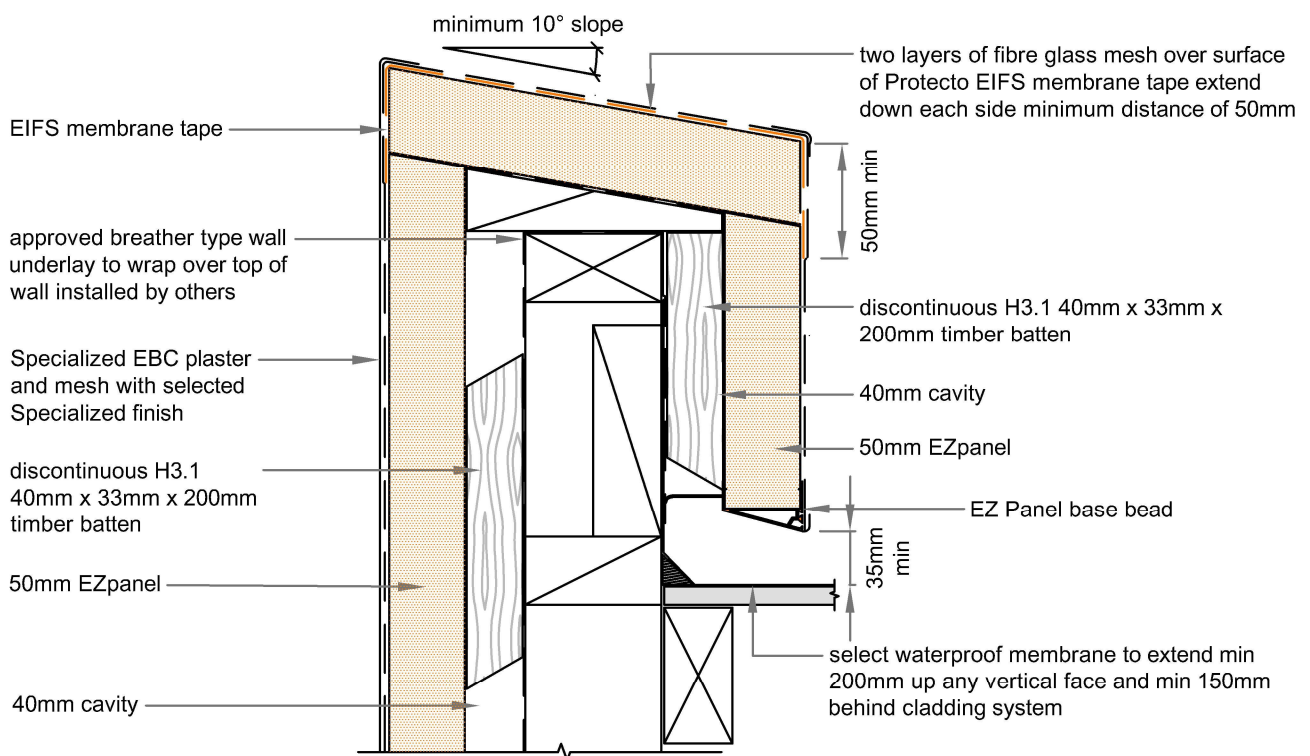

note: if roof is being used as an internal gutter the cladding must be a minimum of 100mm above the membrane surface

note: if parapet wall top is wider than 300mm - it must have a minimum slope of 30°

13C

PARAPET EIFS DETAIL

SCALE: 1:5

50mm EZpanel - 40mm cavity with timber battens